# Zenn Glue Down 55.
## technical data.

BERRY ALLOC

| | Contains | m² | Gross Weight (incl. box & pallet) |
|---|---|---|---|
| 1 pack Zenn Glue Down 55 planks | 20 planks | 4,34 m² | 19,58 kg |
| 1 pallet Zenn Glue Down 55 planks | 45 packs | 195,10 m² | 901,10 kg |
| 1 pack Zenn Glue Down 55 tiles | 10 tiles | 4,18 m² | 18,93 kg |
| 1 pallet Zenn Glue Down 55 tiles | 46 packs | 192,31 m² | 890,78 kg |
| 1 pack Zenn Glue Down 55 herringbone | 64 planks | 4,46 m² | 19,86 kg |
| 1 pallet Zenn Glue Down 55 herringbone | 42 packs | 187,29 m² | 854,12 kg |

| Product specifications | Norm | Zenn Glue Down 55 Planks | Zenn Glue Down 55 Tiles | Zenn Glue Down 55 Herringbone |
|---|---|---|---|---|
| Dimensions | EN ISO 24342 | L 1219,2 x W 177,8 mm | L 914,4 x W 457,2 mm | L 609,6 x W 114,3 mm |
| Wear layer | EN ISO 24340 | 0,55 mm | 0,55 mm | 0,55 mm |
| Embossing | | wood embossed | stone embossed | wood embossed |
| Total thickness | EN ISO 24346 | 2,5 mm | 2,5 mm | 2,5 mm |
| Locking system | | no | no | no |
| Bevel type | | micro V4 | micro V4 | micro V4 |
| Usage classification | EN ISO 10582 | 23/33/42 | 23/33/42 | 23/33/42 |
| Residential/commercial warranty | | For warranty conditions, visit our document centre at berryalloc.com | | |


| Test results | Norm | Results |
|---|---|---|
| Underfloor heating | EN ISO 12524 | suitable (detailed instructions on www.berryalloc.com) |
| Castor chair | EN ISO 4918 | pass |
| Fire resistance | EN 13501-1 | Bfl-s1 |
| Chemical resistance | EN ISO 26987 | OK |
| Residual indentation | EN ISO 24343-1 | ≤ 0,10 mm – pass |
| Thermal resistance | ISO 8302 | 0,010 m² K/W |
| Slip resistance | DIN 51130 | R10 |
| | EN ISO 13893 | class DS |
| Pendulum slip resistance (PTV) | EN 16165 | 36+ |
| Sound reduction: impact sound | EN ISO 10140-3 EN ISO 717-2 | 2 dB |
| Dimensional stability | EN ISO 23999 | ≤ 0,15 % - pass |
| Light fastness | EN ISO 105-B02 | ≥ 6 - pass |
| Static electrical propensity | EN 1815 | antistatic (≤ 2 kV) |

vinyl planks & tiles.

# Zenn Glue Down 55.
technical data.

BERRY ALLOC

## Composition

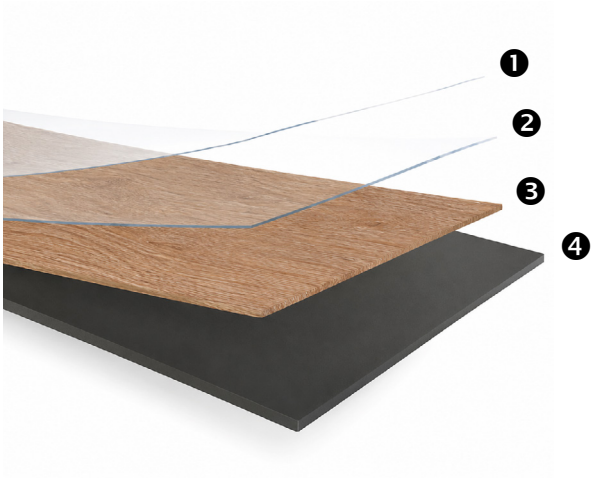


1. Protective PU coating/lacquer
2. Wear layer 0,55 mm
3. Decor layer
4. Backing layer

vinyl planks & tiles.